

A01d LOW PROFILE SHRUNK IDC SOCKET

PITCH: 2.54mm * 2.54mm

SPECIFICATIONS



Material

Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze



Electrical

Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C

- ▶ Terminated with L01-1.27mm pitch flat ribbon cable.
- ▶ Mating Suggestion : C88, C88a & C88b series.

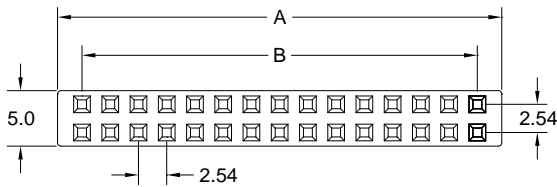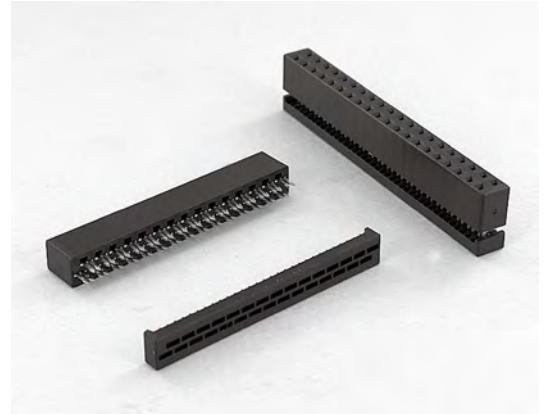

POSITION	A	B
6	9.48	5.08
8	12.02	7.62
10	14.56	10.16
12	17.10	12.70
14	19.64	15.24
16	22.18	17.78
18	24.72	20.32
20	27.26	22.86
24	32.34	27.94
26	34.88	30.48
30	39.96	35.56
34	45.04	40.64
40	52.66	48.26
50	65.36	60.96
60	78.06	73.66
64	83.14	78.74

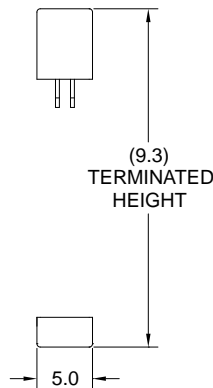

How to order: A01d - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.SPECIAL FUNCTION	5.INSULATOR COLOR
06 08 10 12 14 16 18 20 24 26 30 34 40 50 60 64	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	D: W/O STRAIN RELIEF W/O BAR	1. BLACK



DON CONNEX
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885
e-mail:info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257