

L04b RAINBOW FLAT RIBBON CABLE

PITCH: 2.54mm & 2.5mm

SPECIFICATIONS

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28 AWG (7*0.127) Stranded Tinned Copper

#26 AWG (7*0.16) Stranded Tinned Copper

Color : Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White, Black 10 Color Repeat

Electrical


Impedance : 120Ω (Unbalanced)

Capacitance : 11.2pF/ft.

Inductance : .14 uH/ft.

Propagation Delay : 1.35 ns/ft.

Insulation Resistance : 1GΩ /M min.

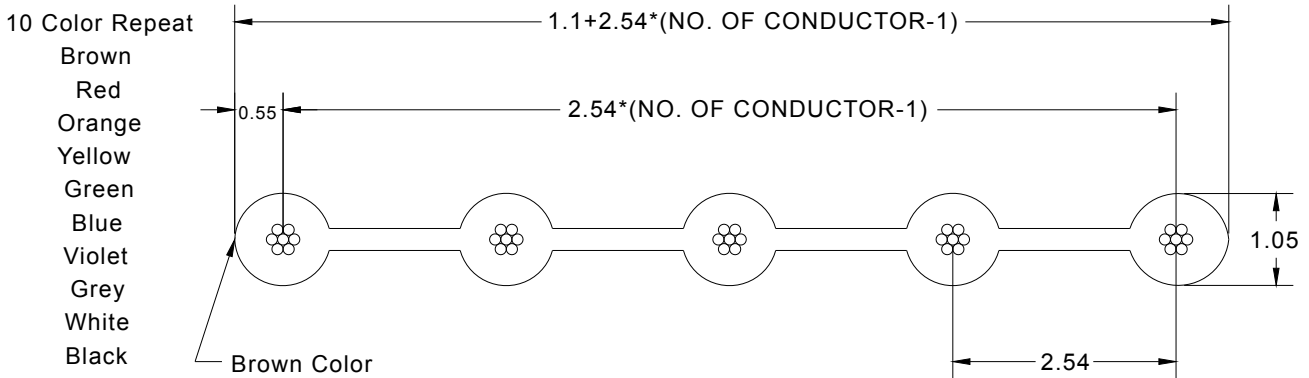

How to order: L04b - 1 - 2 - 3 - 4 - 5 - G(RoHS)

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.PTICH OPTION	4.WIRE SIZE	5.CABLE LENGTH / UNIT
03 TO 36	P: PVC	A: 2.54mm B: 2.5mm	A: 28 AWG B: 26 AWG	C: CM F: FEET I: INCH M: METER

