

B28 FEMALE HEADER WITH LOCATING PEG SMT

PITCH: 1.27mm * 1.27mm

SPECIFICATIONS


Material

Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze


Electrical

Current Rating : 0.5 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding Voltage : 250V AC for 1minute
 Operating Temperature : -40°C to +105°C






► Mating Suggestion : C92, C92a, C92b, C93 & C93a series.

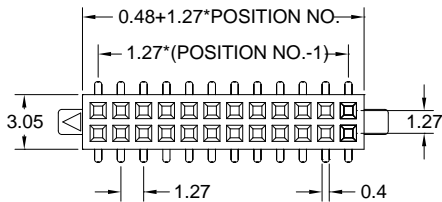

(TYPE A)

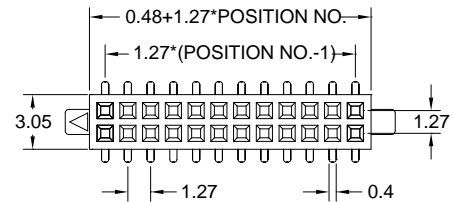


(TYPE B)

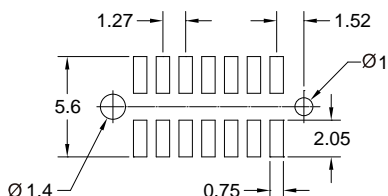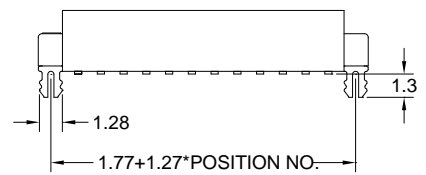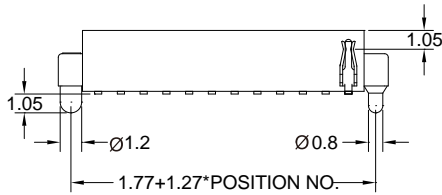

RECOMMENDED P.C.B LAYOUT

HEIGHT	X	Y
A	2.1	2.25
B	3.4	3.55
C	4.3	4.45

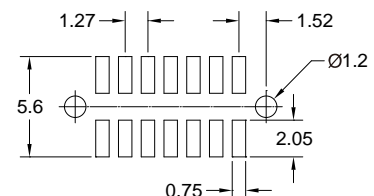

RECOMMENDED P.C.B LAYOUT

How to order: B28 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - G(RoHS)

1.NO. OF CONTACT		2.CONTACT MATERIAL		3.CONTACT PLATING	
DUAL ROW 2*2 - 2*50		B: PHOSPHOR BRONZE		T: TIN PLATED S: SELECTIVE G: GOLD FLASH	
4. INSULATOR HEIGHT	5.LOCATING PEG	6.PACKAGING	7. INSULATOR COLOR	A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	
A: 2.1mm B: 3.4mm C: 4.3mm	A: TYPE A (PLASTIC) B: TYPE B (METAL)	A:TUBE WITH PAD B: TUBE W/O PAD C: TAPE & REEL WITH PAD	1. BLACK		



DON CONNEX
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885
e-mail: info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257