

B28c SINGLE ROW FEMALE HEADER SMT

PITCH: 1.27mm

SPECIFICATIONS


Material

Insulator : LCP, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze


Electrical

Current Rating : 0.5 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding Voltage : 250V AC for 1minute
 Operating Temperature : -40°C to +105°C






► Mating Suggestion : C09b, C10b, C45b & C46b series.

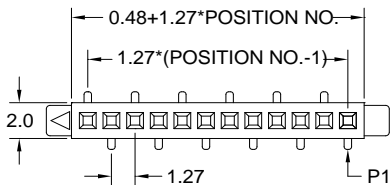

(TYPE A)

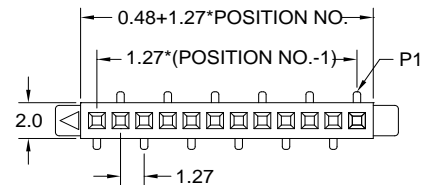


(TYPE B)

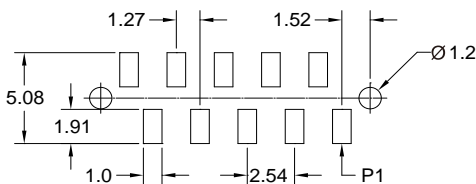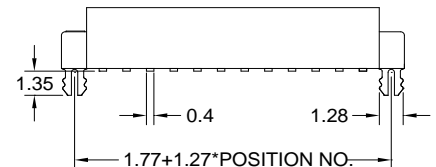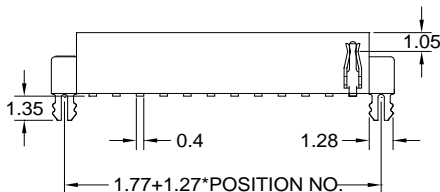

RECOMMENDED P.C.B LAYOUT

HEIGHT	X	Y
A	2.1	2.25
B	3.4	3.55
C	4.3	4.45

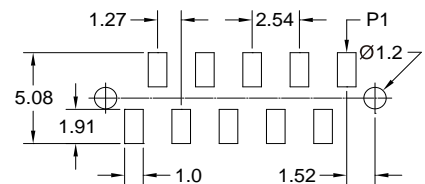

RECOMMENDED P.C.B LAYOUT



How to order: B28c - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - G(RoHS)

1.NO. OF CONTACT		2.CONTACT MATERIAL			3.CONTACT PLATING
SINGLE ROW 1*2 - 1*50		B: PHOSPHOR BRONZE			T: TIN PLATED S: SELECTIVE G: GOLD FLASH
4.INSULATOR HEIGHT	5.FOOT RANK TYPE	6.SPECIAL FUNCTION	7.PACKAGING	8.INSULATOR COLOR	A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD
A: 2.1mm B: 3.4mm C: 4.3mm	A: TYPE A B: TYPE B	A: WITH LOCATING CLIP B: W/O LOCATING CLIP	A: TUBE W PAD B: TUBE W/O PAD C: TAPE & REEL W PAD	1. BLACK	