

L04a FLAT RIBBON CABLE

PITCH: 2.5mm & 2.54mm

SPECIFICATIONS

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #26 AWG Overcoated Stranded Tinned Copper

#26 AWG Stranded Tinned Copper

Color : Grey

Electrical


Impedance : 120Ω (Unbalanced)

Capacitance : 11.2pF/ft.


Inductance : .14 uH/ft.

Propagation Delay : 1.35 ns/ft.


Insulation Resistance : 1GΩ /M min.



TYPE A



TYPE B

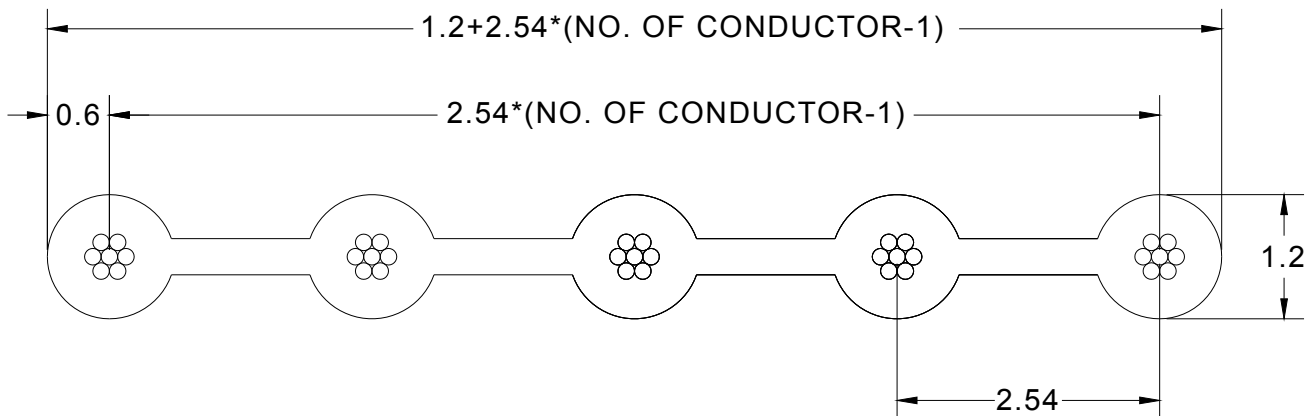

How to order: L04a - 1 - 2 - 3 - 4 - 5 - 6 - 7 - G(RoHS)

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.PITCH OPTION	4.WIRE SIZE
03 TO 24	P: PVC	A: 2.54mm B: 2.5mm	B: 26 AWG
5.CONDUCTOR OPTION	6.CABLE STYLE	7.CABLE LENGTH / UNIT	
A: OVERCOATED STRANDED TINNED COPPER B: STRANDED TINNED COPPER	A: TYPE A B: TYPE B	C: CM F: FEET I: INCH M: METER	



DON CONNEX
ELECTRONICS CO., LTD

T:886 2 86483356 | F:886 2 86485885
e-mail:info@donconnex.com.tw



Connector:E163339 | Flat cable:E162690
Wiring Harnesses:E312257

